



# Crimped Wire Wheel Brushes

Precision-formed crimps in each bristle wire of these brushes impart a slight flexing action that produces a more gentle brushing action without reducing the efficiency of the brush in surface cleaning and texturing operations. Slight "knee-action" in the bristles produces some "give" in the wires to soften the impact angle of each wire against the surface being brushed. Available in some sizes in a choice of long or short bristles; the short bristles produce a stiffer action.



## NARROW FACE CRIMPED WIRE WHEEL BRUSHES

H/C Steel	Stainless Steel	Diameter	Wire Size	Arbor Hole	Trim Length	Face Width	M.S.F.S. (R.P.M.S.)
72704		3"	.006	3/8-1/2"	1/2"	3/8"	6000
72714		3"	.0118	3/8-1/2"	1/2"	3/8"	6000
72724	72734	4"	.006	3/8-1/2"	13/16"	3/8"	6000
72744		4"	.008	3/8-1/2"	13/16"	3/8"	6000
72754		4"	.0095	3/8-1/2"	13/16"	3/8"	6000
72764	72774	4"	.0118	3/8-1/2"	13/16"	3/8"	6000
72784		4"	.014	3/8-1/2"	13/16"	3/8"	6000
72795	72805	6"	.006	1/2-5/8"	1-7/16"	3/8"	6000
72815		6"	.008	1/2-5/8"	1-7/16"	3/8"	6000
72825	72835	6"	.0104	1/2-5/8"	1-7/16"	3/8"	6000
72845	72855	6"	.0118	1/2-5/8"	1-7/16"	3/8"	6000
72865		6"	.014	1/2-5/8"	1-7/16"	3/8"	6000
72875	72885	8"	.006	1/2-5/8"	2-1/16"	3/8"	6000
72895		8"	.008	1/2-5/8"	2-1/16"	3/8"	6000
72905		8"	.0104	1/2-5/8"	2-1/16"	3/8"	6000
72915	72925	8"	.0118	1/2-5/8"	2-1/16"	3/8"	6000
72935		8"	.014	1/2-5/8"	2-1/16"	3/8"	6000
72948		10"	.0118	3/4"	2-3/8"	3/4"	3000
72958	72968	10"	.014	3/4"	2-3/8"	3/4"	3000
72978		12"	.006	1-1/4"	2-15/16"	3/4"	3000
72988		12"	.0104	1-1/4"	2-15/16"	3/4"	3000
72998		12"	.0118	1-1/4"	2-15/16"	3/4"	3000
73008		12"	.014	1-1/4"	2-15/16"	3/4"	3000
73018		15"	.0118	1-1/4"	4-7/16"	3/4"	3000
73028		15"	.014	1-1/4"	4-7/16"	3/4"	3000

### ARBOR CHANGE INFORMATION

If an arbor hole is required that is different than the arbor hole listed, please specify the difference by changing the last digit only of the catalog number to comply with the arbor hole chart...

### ARBOR HOLE

### LAST DIGIT



1/4".....	1
3/8".....	2
1/2".....	3
1/2"-3/8" Reduced.....	4
5/8"-1/2" Reduced.....	5
5/8"-11" Thread.....	6
5/8".....	7
3/4".....	8
1-1/4".....	9
Other (Specify).....	0

# Crimped Wire Wheel Brushes

## WIDE FACE CRIMPED WIRE WHEEL BRUSHES

H/C Steel	Stainless Steel	Diameter	Wire Size	Arbor Hole	Trim Length	Face Width	M.S.F.S. (R.P.M.S.)
72453		4-1/2"	.0118	1/2"	3/4"	1"	6000
72463		4-1/2"	.014	1/2"	3/4"	1"	6000
72473	72483	6"	.006	1/2"	1-1/8"	1-1/8"	6000
72493		6"	.008	1/2"	1-1/8"	1-1/8"	6000
72503		6"	.0104	1/2"	1-1/8"	1-1/8"	6000
72513	72523	6"	.0118	1/2"	1-1/8"	1-1/8"	6000
72533	72543	6"	.014	1/2"	1-1/8"	1-1/8"	6000
72557		7"	.0118	5/8"	1-5/8"	1-1/4"	6000
72567		7"	.014	5/8"	1-5/8"	1-1/4"	6000
72577		8"	.006	5/8"	1-3/8"	1-1/4"	4000
72587		8"	.0095	5/8"	1-3/8"	1-1/4"	4000
72597	72607	8"	.0118	5/8"	1-3/8"	1-1/4"	4000
72617		8"	.014	5/8"	1-3/8"	1-1/4"	4000
72627		8"	.020	5/8"	1-3/8"	1-1/4"	4000
72639		10"	.0104	1-1/4"	1-7/8"	1-5/8"	3000
72649		10"	.0118	1-1/4"	1-7/8"	1-5/8"	3000
72659		10"	.014	1-1/4"	1-7/8"	1-5/8"	3000
72669		12"	.0118	1-1/1"	2-7/8"	1-3/4"	3000
72679	72615	12"	.014	1-1/4"	2-7/8"	1-3/4"	3000
72689		12"	.020	1-1/4"	2-7/8"	1-3/4"	3000

## ADAPTER

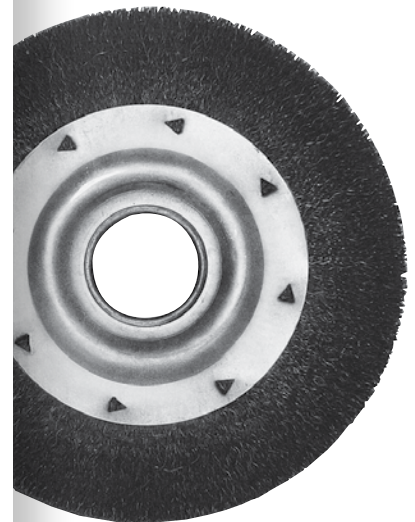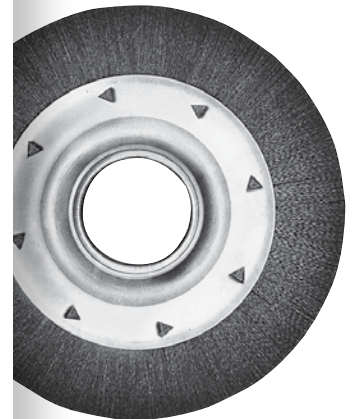

ALWAYS  
OBSERVE THE  
FOLLOWING SAFETY PRACTICES

- Never operate Rotary Brushes above recommended safe speed
- Keep all machine guards in place during operation
- Always wear protective eye goggles when working.