

# Twisted Tuft Wheel Brushes

These brushes are used chiefly in cleaning weld beads, deburring and cleaning machined surfaces and edges, removing flash and sheared edges from sheared or punched sheet metal, and texturing metal surfaces for decorative purposes. Brushes combine highest-quality straight tempered steel wire with maximum twist imparted to provide any desired flexing action in the bristles.




## WIRE WHEEL BRUSHES - STANDARD TWIST

CATALOG NUMBER		Diameter	Wire Size	Arbor Hole	Trim Length	Face Width	M.S.F.S. (R.P.M.S)
H/C Steel	Stainless						
71904	71914	3"	.0118	3/8-1/2"	11/16"	1/2"	25000
71924	71934	3"	.014	3/8-1/2"	11/16"	1/2"	25000
71944	71954	3"	.020	3/8-1/2"	11/16"	1/2"	25000
71964	71974	4"	.0118	3/8-1/2"	7/8"	5/8"	20000
71984	71994	4"	.014	3/8-1/2"	7/8"	5/8"	20000
72004		4"	.016	3/8-1/2"	7/8"	5/8"	20000
72014		4"	.020	3/8-1/2"	7/8"	5/8"	20000
72025	72035	6"	.0118	1/2-5/8"	1-3/8"	1/2"	9000
72045		6"	.014	1/2-5/8"	1-3/8"	1/2"	9000
72055	72065	6"	.016	1/2-5/8"	1-3/8"	1/2"	9000
72075		6"	.023	1/2-5/8"	1-3/8"	1/2"	9000
72085		7"	.014	1/2-5/8"	1-7/8"	5/8"	9000
72095	72105	8"	.0118	1/2-5/8"	1-5/8"	5/8"	6000
72115		8"	.014	1/2-5/8"	1-5/8"	5/8"	6000
72125	72135	8"	.016	1/2-5/8"	1-5/8"	5/8"	6000
72145		8"	.023	1/2-5/8"	1-5/8"	5/8"	6000
72158		10"	.0118	3/4"	2-1/4"	3/4"	4500
72168		10"	.014	3/4"	2-1/4"	3/4"	4500
72178		10"	.016	3/4"	2-1/4"	3/4"	4500
72189		12"	.0118	1-1/4"	2-1/8"	3/4"	3600
72199		12"	.014	1-1/4"	2-1/8"	3/4"	3600
72209		12"	.016	1-1/4"	2-1/8"	3/4"	3600
72219		15"	.0118	1-1/4"	3-1/2"	13/16"	3000
72229		15"	.016	1-1/4"	3-1/2"	13/16"	3000

# Twisted Tuft Wheel Brushes

## WIRE WHEEL BRUSHES - STRINGER TWIST

CATALOG NUMBER		Diameter	Wire Size	Arbor Hole	Trim Length	Face Width	M.S.F.S. (R.P.M.S)
H/C Steel	Stainless						
72256	72266	6"	.020	5/8-11"	1-3/8"	3/16"	9000
72276	72286	6"	.023	5/8-11"	1-3/8"	1/2"	9000
72295	72305	6"	.020	1/2-5/8"	1-3/8"	3/16"	9000
72315	72325	6"	.023	1/2-5/8"	1-3/8"	1/2"	9000

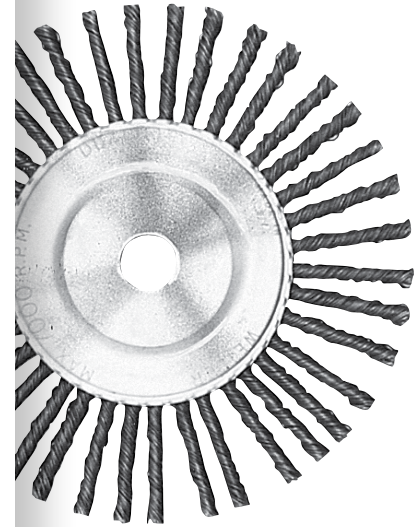

## WIRE WHEEL BRUSHES - CABLE TWIST (Not Shown)

CATALOG NUMBER		Diameter	Wire Size	Arbor Hole	Trim Length	Face Width	M.S.F.S. (R.P.M.S)
H/C Steel	Stainless						
72405	72415	6"	.023	1/2-5/8"	1-3/8"	3/8"	9000
72425		8"	.023	1/2-5/8"	1-5/8"	1/2"	6000

### ARBOR CHANGE INFORMATION

If an arbor hole is required that is different than the arbor hole listed, please specify the difference by changing the last digit only of the catalog number to comply with the arbor hole chart...

ARBOR HOLE	LAST DIGIT
1/4".....	1
3/8".....	2
1/2".....	3
1/2"-3/8" Reduced.....	4
5/8"-1/2" Reduced.....	5
5/8"-11" Thread.....	6
5/8".....	7
3/4".....	8
1-1/4".....	9
Other (Specify).....	0



**ALWAYS OBSERVE THE FOLLOWING SAFETY PRACTICES**

- Never operate Rotary Brushes above recommended safe speed
- Keep all machine guards in place during operation
- Always wear protective eye goggles when working.